


BSS 10-70 CS

Note : Dimensions may vary depending on truck model.

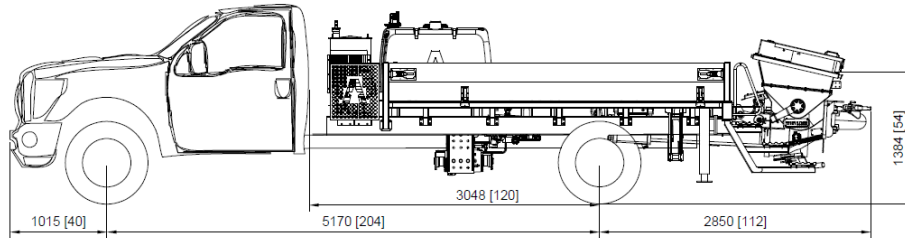

General

Weight(without truck) : 4560 kg (10052 lbs)

Pumping Unit

Theo. Conc. Output(max) : 70 m³/h

Piston side Theo. Conc. Pressure(max) : 81 bar (783 psi)

Stroke : 28 Stroke / min

Theo. Conc. Output(max) : 105 m³/h

Rod side Theo. Conc. Pressure(max) : 54 bar (783 psi)

Stroke : 42 Stroke / min

Concrete Valve : S valve system

Switch-over pressure S-tube : 190 bar (2756 psi)

Delivery cylinders diameter : 230 mm (9,05")

Delivery cylinders stroke : 1000 mm (3'4")

Hopper capacity : 450 lt (119 gal)

Hopper outlet diameter : 125 mm (4,9")

Lateral output pipeline : 150 mm (5,9")

Switching System : Elect. Magn. Sensor

Lubrication System : Hydraulic (LINCOLN)

Driven by : PTO or gearbox

Electric box : Waterproof and PLC controlled

Water tank and pump

Water Pump : 67 lpm

Water Tank Capacity : 650 lt and hose 15 m (172 gal and 49'3")

Control

■ Smartstar Control

■ Color LCD

■ Diagnostic

■ Fuel Saving Mode

■ Remote Control (Hetric)

Options

■ Hopper vibrator

■ Hydraulic driven fan

■ Betonstar IoT system

■ Remote control(HBC)

■ Air Compressor

■ High pressure cleaning kit (140 bar/2030 psi)