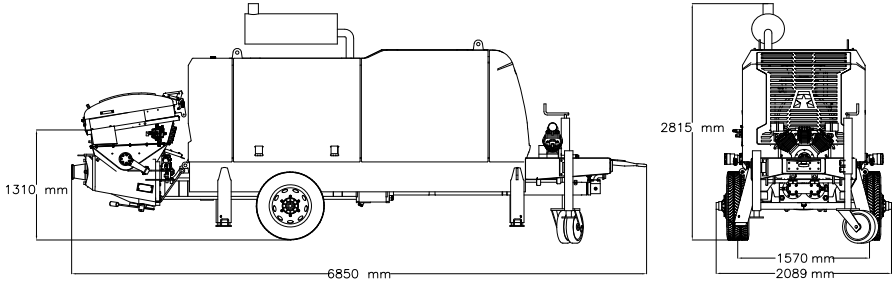
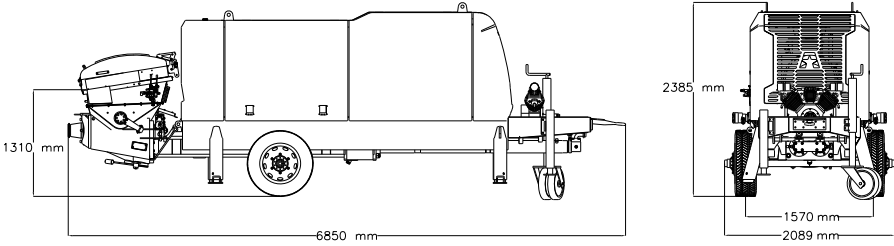


Stationary Concrete Pump

		BSS 21-90-D Weight: : 7.500 kg Engine* : 265 kW (350 hp) (Diesel)
		BSS 21-90-E Weight: : 8.750 kg Engine* : 160 kW (290 hp) (Electric)

PUMPING UNIT

Rod Side	Theo. Conc. Output (max)	: 90 m³/h
	Theo. Conc. Pressure (max)	: 92 bar
	Stroke	: 23 Stroke / min
Piston Side	Theo. Conc. Output (max)	: 56 m³/h
	Theo. Conc. Pressure (max)	: 150 bar
	Stroke	: 14 Stroke / min
Concrete Valve	: S Valve System	
Switch-Over Pressure S-Tube	: 190 bar	
Delivery Cylinders Diameter	: 200 mm	
Delivery Cylinders Lenght	: 2100 mm	
Hopper Capacity	: 650 l	
Hopper Outlet Diameter	: 125 mm	
Reducer Output Diameter	: 150 mm	
Switching System	: Elect. Magn. Sensor	
Lubrication System	: Hydraulic (LINCOLN)	
Electric Box	: Waterproof and PLC Controlled	

CONTROL SYSTEM

■ Smartstar Control	
■ Color LCD	
■ Diagnostic	
■ Fuel Saving Mode	
■ Remote Control	

OPTIONS

■ Hopper Vibrator	
■ Hydraulic Driven Fan	
■ Betonstar IoT System	
■ Remote Control (HBC)	
■ Air Compressor	
■ High Pressure Cleaning Kit (140 bar)	
■ Water Pump (67 lpm)	
■ Water Tank (500 l and Hose 15 m)	

(*) Engine power and norm values vary according to the engine brand.