


BSS 21 – 90 D - CS

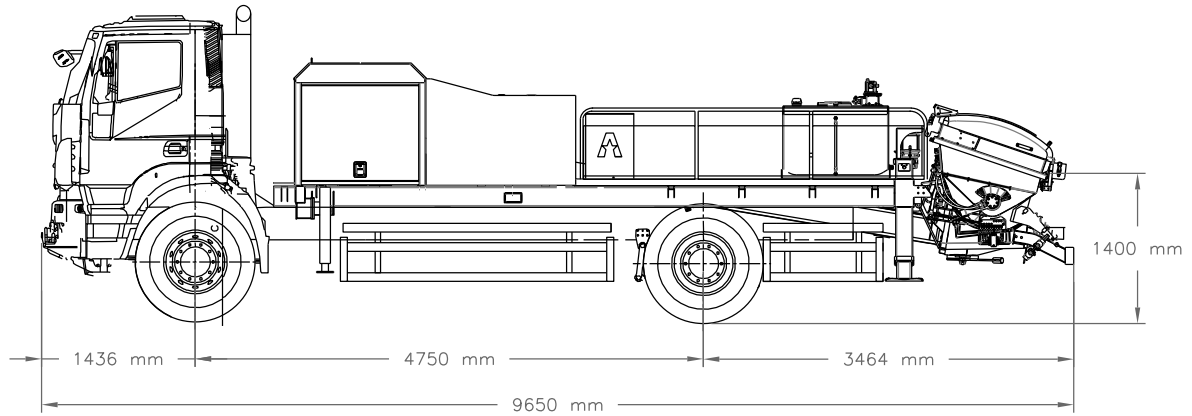

Note :Dimensions may vary depending on truck model.

GENERAL		OPTIONS	
Weight (Without Truck)	: 11.840 kg	■ Hopper Vibrator	
ENGINE(*)		■ Hydraulic Driven Fan	
Power	: 265 kW (360 hp) (Diesel)	■ Betonstar IoT System	
PUMPING UNIT		■ Remote Control (HBC)	
Rod Side	Theo. Conc. Output (max) : 90 m ³ /h	■ Air Compressor	
	Theo. Conc. Pressure (max) : 92 bar	■ High Pressure Cleaning Kit (140 bar)	
	Stroke : 24 Stroke / min		
Piston Side	Theo. Conc. Output (max) : 60 m ³ /h		
	Theo. Conc. Pressure (max) : 148 bar		
	Stroke : 15 Stroke / min		
Concrete Valve	: S Valve System		
Switch-Over Pressure S-Tube	: 190 bar		
Delivery Cylinders Diameter	: 200 mm		
Delivery Cylinders Length	: 2100 mm		
Hopper Capacity	: 650 l		
Hopper Outlet Diameter	: 125 mm		
Reducer Output Diameter	: 150 mm		
Switching System	: Elect. Magn. Sensor		
Lubrication System	: Hydraulic (LINCOLN)		
Driven by	: Engine		
Electric Box	: Waterproof and PLC Controlled		
WATER TANK AND PUMP			
Water Pump	: 67 lpm		
Water Tank Capacity	: 650 l and Hose 15 m		
CONTROL SYSTEM			
■ Smartstar Control			
■ Color LCD			
■ Diagnostic			
■ Fuel Saving Mode			
■ Remote Control (Hetric)			

(*) Engine power and norm values vary according to the engine brand.