


**AS 26 – 4Z**

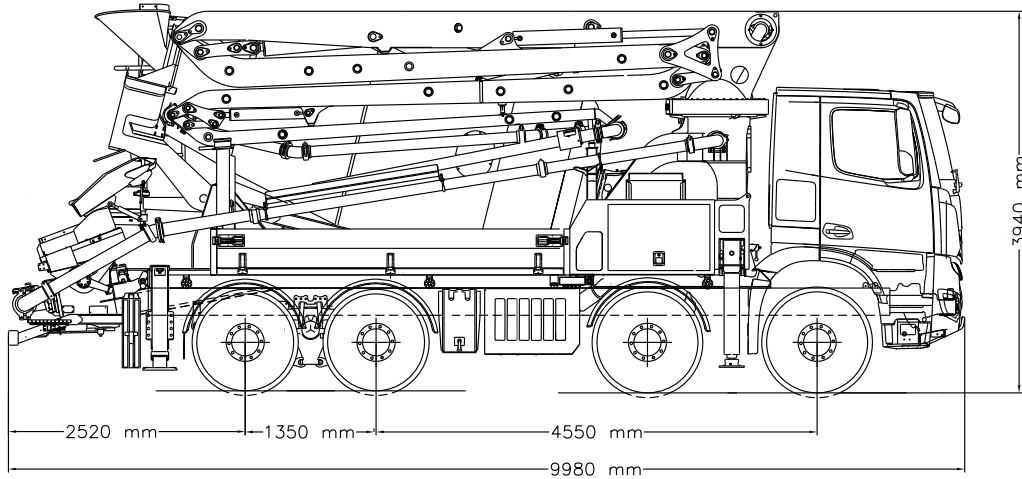

Note :Dimensions may vary depending on truck model.

Pump	AS 26.70 – 4Z
Theo. Conc. Output(max) (Piston Side)	70 m <sup>3</sup> / h
Theo. Conc. Pressure(max) (Piston Side)	81 bar
Stroke	28 Stroke / min
Concrete Cylinder Dimensions	230 mm X 1000 mm

Standard Equipments	
Hopper Capacity	: 450 liter
Switching System	: Elect. Magn. Sensor
Concrete Valve	: S, Valve System
Electric Box	: Waterproof and PLC controlled
Remote Control	: Included (HETRONIC)
End Hose	: 3 m
Water Tank Capacity	: 500 liter and hose 15 m (Pressure tank)
Lubrication System	: Hydraulic (LINCOLN)
Driven by	: PTO or gear box

Boom System	
Boom Type	: 4Z
Sections	: 4
Boom Swing Speed	: 104 sec
Boom Swinging Angle	: 365°
Concrete Pipe Diameter	: 100 mm

Support Leg System	
Front Legs	: Sliding support
Rear Legs	: Fixed

Mixer System	
Nominal Capacity	: 7 m <sup>3</sup>
Drum Speed	: 1-14 rpm
Filling Rotio	: %60

Control System	
■ Smartstar Control	
■ Color LCD	
■ Rear Keyboard	
■ Diagnostic	
■ Fuel Saving Mode	

Options	
■ Hopper vibrator	
■ Hydraulic driven fan	
■ Stability control	
■ Air compressor	
■ End hose squeezer	
■ High pressure cleaning kit (140 bar)	
■ Betonstar IoT system	
■ Remote control(HBC)	
■ Auto unfolding	
■ Water and oil tank heater	
■ Water pump hydraulic operated	

Diagrams

