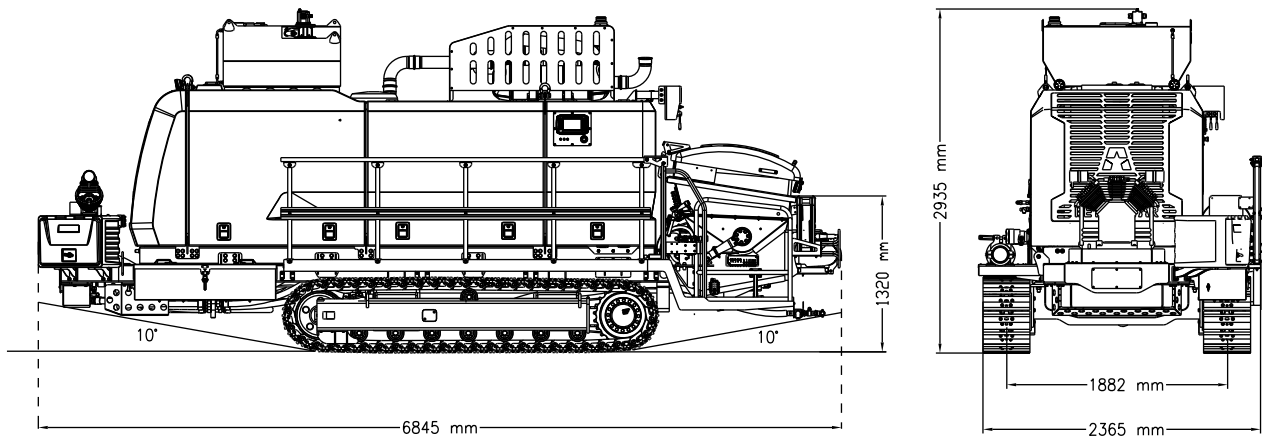


BSC 21.90

**General**

Weight	: 10.500 kg
Maximum speed	: 2 km/h

Engine*

Power	: 185 kW (252 hp)(Diesel)
-------	---------------------------

Pumping Unit

Rod side	Theo. Conc. Output(max)	: 90 m ³ /h
	Theo. Conc. Pressure(max)	: 92 bar
	Stroke	: 23 Stroke / min
Piston side	Theo. Conc. Output(max)	: 56 m ³ /h
	Theo. Conc. Pressure(max)	: 148 bar
	Stroke	: 14 Stroke / min

Concrete Valve	: S valve system
Switch-over pressure S-tube	: 190 bar
Delivery cylinders diameter	: 200 mm
Delivery cylinders stroke	: 2100 mm
Hopper capacity	: 650 lt
Hopper outlet diameter	: 125 mm
Lateral output pipeline	: 150 mm
Switching System	: Elect. Magn. Sensor
Lubrication System	: Hydraulic (LINCOLN)
Electric Box	: Waterproof and PLC controlled

Water tank and pump

Water Pump	: 67 lpm
Water Tank Capacity	: 550 lt and hose 15 m

Control

■ Smartstar Control
■ Color LCD
■ Diagnostic
■ Fuel Saving Mode
■ Remote Control(Hetronic)

Options

■ Hopper vibrator
■ Hydraulic driven fan
■ Betonstar IoT system
■ Remote control(HBC)
■ Air Compressor
■ High pressure cleaning kit (140 bar)

(*) Engine power and norm values vary according to the engine brand.