


## BSS 10.70 CP

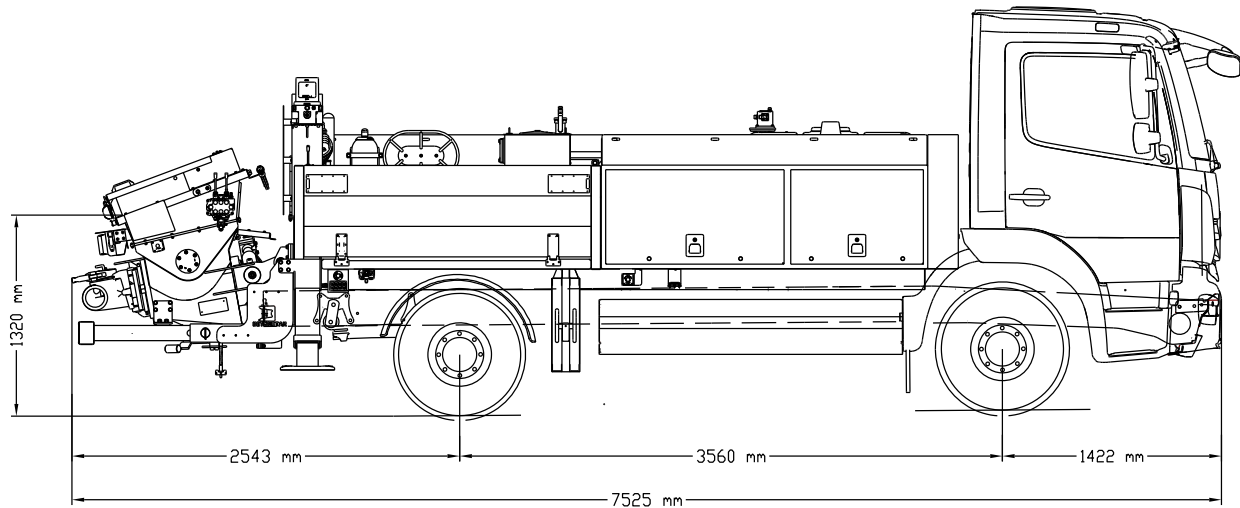

Note : Dimensions may vary depending on truck model.

### General

Weight(without truck) : 4645 kg

### Pumping Unit

	Theo. Conc. Output(max)	: 70 m <sup>3</sup> /h
<b>Piston side</b>	Theo. Conc. Pressure(max)	: 81 bar
	Stroke	: 28 Stroke / min
	Theo. Conc. Output(max)	: 90 m <sup>3</sup> /h
<b>Rod side</b>	Theo. Conc. Pressure(max)	: 54 bar
	Stroke	: 36 Stroke / min
Concrete Valve	: S valve system	
Switch-over pressure S-tube	: 190 bar	
Delivery cylinders diameter	: 230 mm	
Delivery cylinders stroke	: 1000 mm	
Hopper capacity	: 450 lt	
Hopper outlet diameter	: 125 mm	
Lateral output pipeline	: 150 mm	
Switching System	: Elect. Magn. Sensor	
Lubrication System	: Hydraulic (LINCOLN)	
Driven by	: PTO or gearbox	
Electric box	: Waterproof and PLC controlled	

### Water tank and pump

Water Pump	: 67 lpm
Water Tank Capacity	: 650 lt and hose 15 m

### Control

- Smartstar Control
- Color LCD
- Diagnostic
- Fuel Saving Mode
- Remote Control(Hetronic)

### Options

- Hopper vibrator
- Hydraulic driven fan
- Betonstar IoT system
- Remote control(HBC)
- Air Compressor
- High pressure cleaning kit (140 bar)