


H37-4Z

BETONSTAR

CONCRETE EQUIPMENT

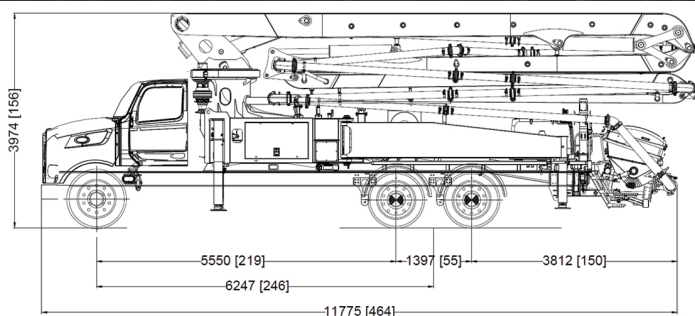


(*) Standard pump model is BST 37.16 4Z.

(*) Dimensions may vary depending on truck model.

PUMP GROUP

Pump Group	BST 37.14H 4Z	BST 37.16 4Z
	Optional	Standard
Conc. Output (max) (Rod Side)	140 m ³ /h (183,11 yd ³ / h)	160 m ³ /h (209,27 yd ³ / h)
Conc. Pressure (max) (Rod Side)	85 bar (1232,82 psi)	85 bar (1232,82 psi)
Stroke	26 Stroke/min	26 Stroke/min
Concrete Cylinder Dimensions	230 mm x 2100 mm (9,05") x (82,68")	250 mm x 2100 mm (9,84") x (82,68")
Remote Control	HBC	HBC
Oil Cooler	Electric / Hydraulic	Electric / Hydraulic

BOOM WORKING DIAGRAM

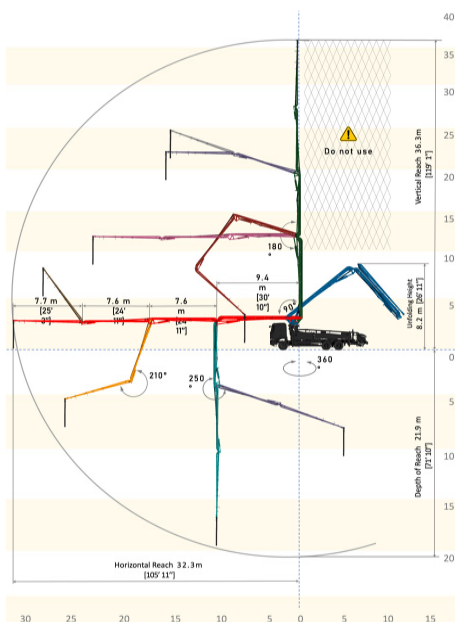

BOOM SYSTEM

Boom type	Z
Sections	4
Boom swing time	135 sec
Boom swinging angle	360°
Delivery line	125 mm (4,92") (DN 125)
Vertical reach	36.3 m (119'1")
Horizontal reach	32.3 m (105'11")
Unfolding height	8.2 m (26'11")
Depth of reach	21.9 m (71'10")
End hose	3 m (9'10") 4" Diameter

