


H40-5RZ

BETONSTAR

CONCRETE EQUIPMENT

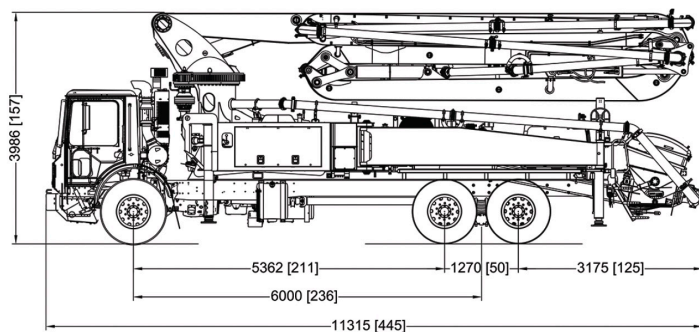


(*) Standard pump model is BST 40.16 5RZ.

(*) Dimensions may vary depending on truck model.

PUMP GROUP

Pump Group	BST 40.14H 5RZ	BST 40.16 5RZ
	Optional	Standard
Conc. Output (max) (Rod Side)	140 m³/h (183,11 yd³ / h)	160 m³/h (209,27 yd³ / h)
Conc. Pressure (max) (Rod Side)	85 bar (1232,82 psi)	85 bar (1232,82 psi)
Stroke	26 Stroke/min	26 Stroke/min
Concrete Cylinder Dimensions	230 mm x 2100 mm (9,05") x (82,68")	250 mm x 2100 mm (9,84") x (82,68")
Remote Control	HBC	HBC
Oil Cooler	Electric / Hydraulic	Electric / Hydraulic

BOOM WORKING DIAGRAM

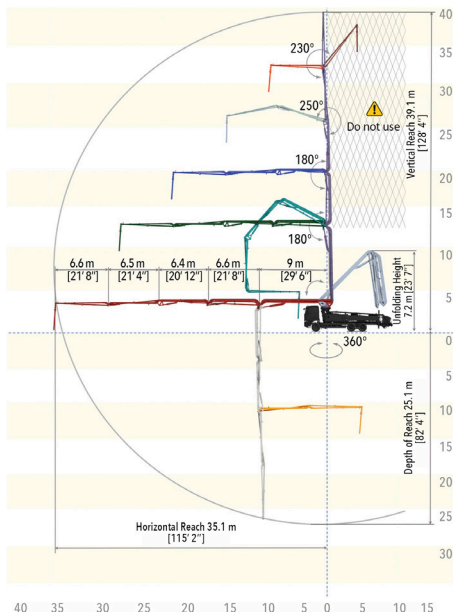

BOOM SYSTEM

Boom type	RZ
Sections	5
Boom swing time	147 sec
Boom swinging angle	360°
Delivery line	125 mm (4,92") (DN 125)
Vertical reach	39.1 m (128'4")
Horizontal reach	35.1 m (115'2")
Unfolding height	7.2 m (23'7")
Depth of reach	25.1 m (82'4")
End hose	3 m (9'10") 4" Diameter

