


H51-5RZ

BETONSTAR

CONCRETE EQUIPMENT

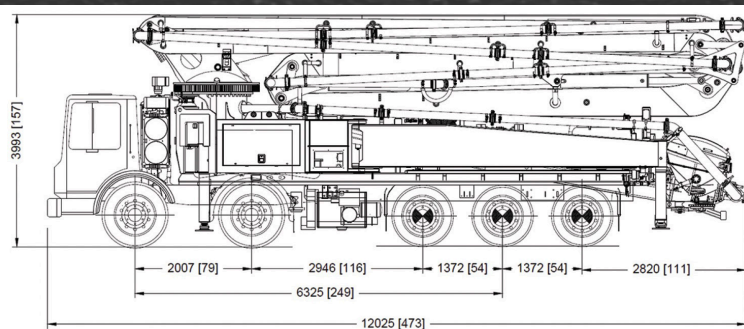


(*) Standard pump model is BST 51.20 5RZ.

(*) Dimensions may vary depending on truck model.

PUMP GROUP

Pump Group	BST 51.16H 5RZ	BST 51.20 5RZ
	Optional	Standard
Conc. Output (max) (Rod Side)	160 m ³ /h (209,27 yd ³ / h)	200 m ³ /h (261,58 yd ³ / h)
Conc. Pressure (max) (Rod Side)	85 bar (1232,82 psi)	85 bar (1232,82 psi)
Stroke	26 Stroke/min	27 Stroke/min
Concrete Cylinder Dimensions	250 mm x 2100 mm (9,84" x (82,68"))	250 mm x 2500 mm (9,84" x (98,42"))
Remote Control	HBC	HBC
Oil Cooler	Electric / Hydraulic	Hydraulic

BOOM WORKING DIAGRAM

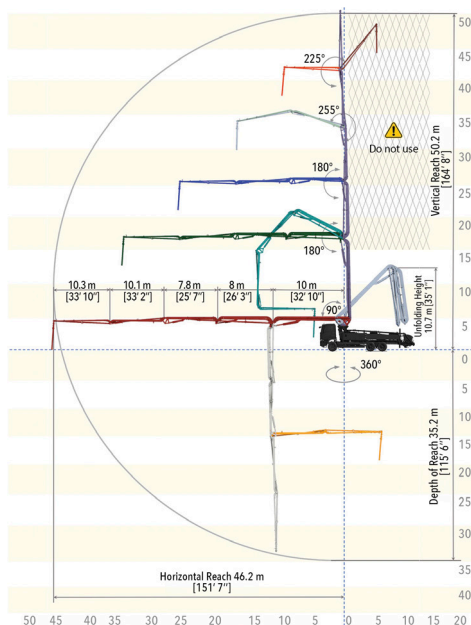

BOOM SYSTEM

Boom type	RZ
Sections	5
Boom swing time	194 sec
Boom swinging angle	360°
Delivery line	125 mm (DN 125)
Vertical reach	50.2 m (164'8")
Horizontal reach	46.2 m (151'7")
Unfolding height	10.7 m (35'1")
Depth of reach	35.2 m (115'6")
End hose	3 m (9'10") 4" Diameter

