


H58-5RZ

BETONSTAR

CONCRETE EQUIPMENT

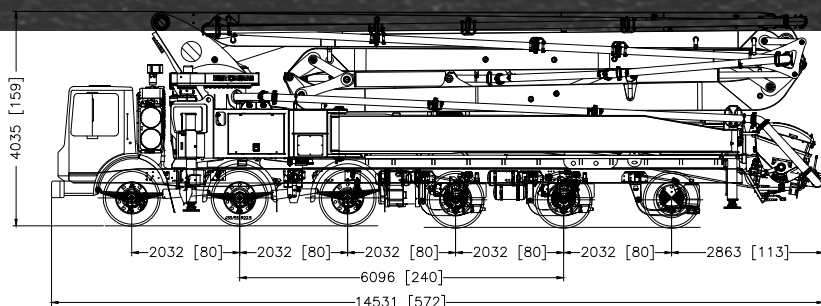

(*) Standard pump model is BST 58.16 5RZ (*) Dimensions may vary depending on truck model.

PUMP GROUP

Pump Group	BST 58.14 5RZ	BST 58.16 5RZ
	Optional	Standard
Conc. Output (max) (Rod Side)	140 m³/h (183,11 yd³ / h)	160 m³/h (209,27 yd³ / h)
Conc. Pressure (max) (Rod Side)	85 bar (1232,82 psi)	85 bar (1232,82 psi)
Stroke	26 Stroke/min	26 Stroke/min
Concrete Cylinder Dimensions	230 mm x 2100 mm (9,05" x (82,68"))	250 mm x 2100 mm (9,84" x (82,68"))
Remote Control	HBC	HBC
Oil Cooler	Electric / Hydraulic	Electric / Hydraulic

BOOM SYSTEM

Boom type	RZ
Sections	5
Boom swing time	222 sec
Boom swinging angle	360°
Delivery line	125 mm (4,92") (DN 125)
Vertical reach	57.2 m (187'8")
Horizontal reach	52.2 m (171'3")
Unfolding height	11.6 m (38'1")
Depth of reach	41.8 m (142'9")
End hose	3 m (9'10") 4" Diameter

BOOM WORKING DIAGRAM

