


H68-6RZ

BETONSTAR

CONCRETE EQUIPMENT

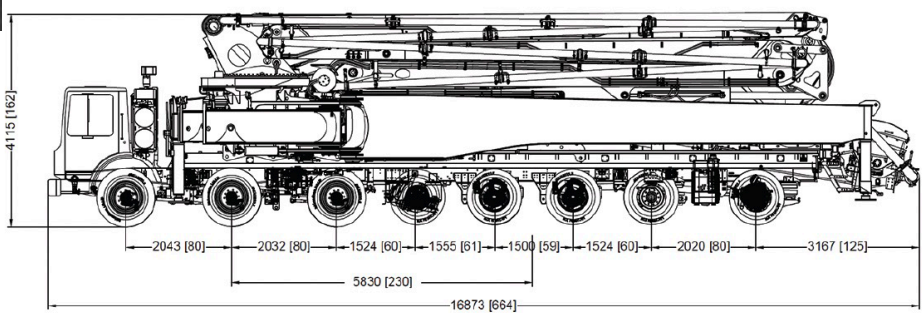

(*) Standard pump model is BST 68.16 6RZ. (*) Dimensions may vary depending on truck model.

PUMP GROUP

Pump Group	BST 68.16 6RZ	BST 68.20 6RZ
	Standard	Optional
Conc. Output (max) (Rod Side)	160 m³/h (209,27 yd³ / h)	200 m³/h (261,58 yd³ / h)
Conc. Pressure (max) (Rod Side)	85 bar (1232,82 psi)	85 bar (1232,82 psi)
Stroke	26 Stroke/min	27 Stroke/min
Concrete Cylinder Dimensions	250 mm x 2100 mm (9,84" x (82,68"))	250 mm x 2500 mm (9,84" x (98,48"))
Remote Control	HBC	HBC
Oil Cooler	Electric / Hydraulic	Hydraulic

BOOM SYSTEM

Boom type	RZ
Sections	6
Boom swing time	264 sec
Boom swinging angle	360°
Delivery line	125 mm (4,92") (DN 125)
Vertical reach	67.1 m (220'2")
Horizontal reach	63.1 m (207")
Unfolding height	12.7 m (41'8")
Depth of reach	41.8 m (137'7")
End hose	3 m (9'10") 4" Diameter

BOOM WORKING DIAGRAM

