




PUMP GROUP

Pump Group	BST 68.20 6RZ
	Standard
"Tho. Conc. Output (max) (Rod Side)"	200 m ³ /h
"Tho. Conc. Pressure (max) (Rod Side)"	85 bar
Stroke	27 Stroke / min
Concrete Cylinder Dimensions	250 mm x 2500 mm
Remote Control	Hetronic / HBC
Cooler	Hydraulic

STANDARD EQUIPMENT

Hopper Capacity	650 l
Switching System	Electromagnetic Sensor
Concrete Valve	S Valve System
Electric Box	IP65 PLC Controlled
Remote Control	Included
Water Pump	67 l/min
Water Tank Capacity	900 l
Water Hose	15 m
Hopper Grease Lubrication System	Electrically Controlled Lubrication System
Driven by	Gearbox (Stiebel)

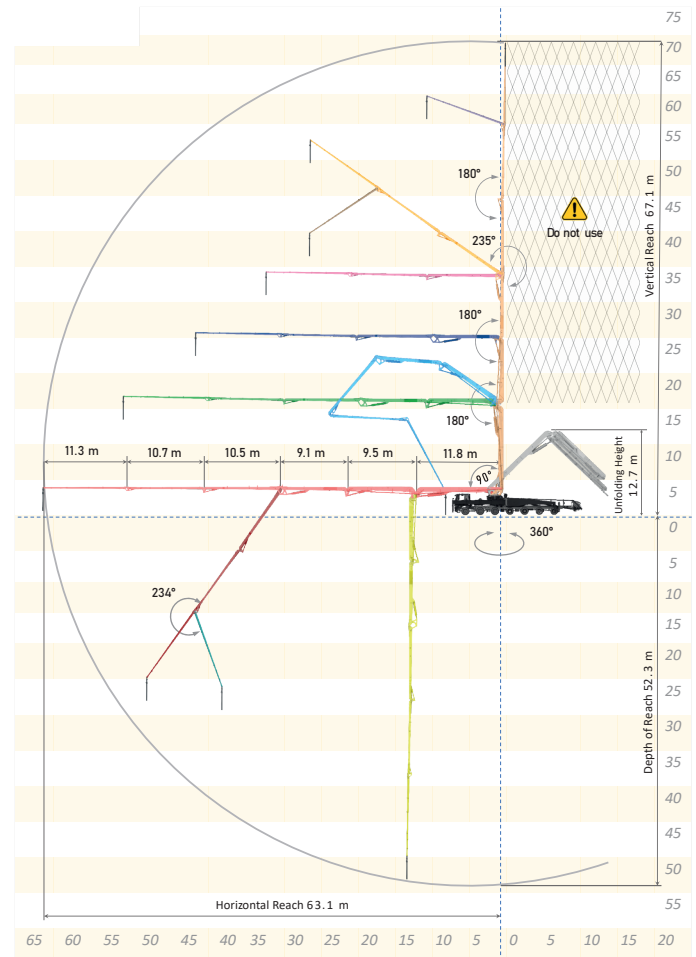

OPTIONS

- Hopper Vibrator
- Oil Tank Heater
- Stability Control
- Air Compressor
- End Hose Squeeze Valve
- High Pressure Cleaning Kit
- Auto Unfolding
- Water Tank Heater
- Hopper Level Sensor

BOOM SYSTEM

Boom type	RZ
Sections	6
Boom Swing Time	264 sec
Boom Swing Angle	360°
Delivery line	125 mm (DN 125)
End Hose	3 m
Vertical reach	67.1 m
Horizontal reach	63.1 m
Unfolding height	12.7 m


CONTROL SYSTEM

- SmartStar Control
- 7" Color SmartStar Display
- IP69K Electronic Keypad
- Fault Diagnosis
- Fuel Economy Mode
- Switch Failure Mode
- Automatic Power Regulation
- Automatic Agitator
- Mixer Safety Switch

SUPPORT LEGS SYSTEM

Front Legs	Type X
Rear Legs	Side Hydraulic Swing

OPERATING CONDITIONS

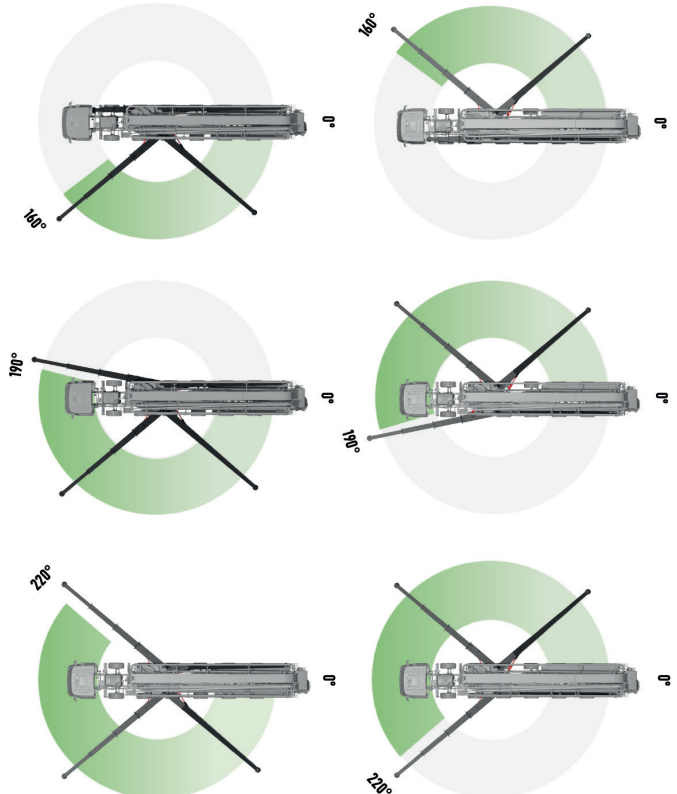

(*) All data shown is theoretical and subject to change without notice.

